


**RoHS**

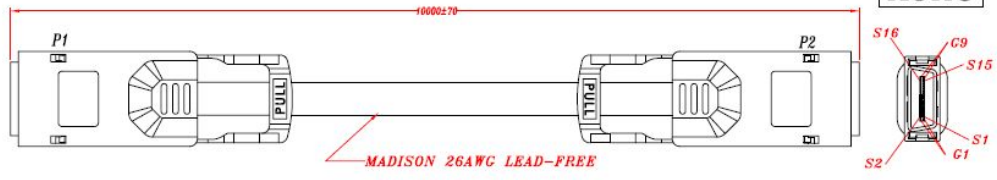

MATERIAL RoHS COMPLIANT:

1. CABLE:

- CONDUCTOR: 8 TWISTED PAIRS, 26AWG SOLID SILVER PLATED COPPER.
- INSULATION: FOAM POLYOLEFIN.
- PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
- PAIR DRAIN WIRE: 28AWG SOLID SILVER PLATED COPPER.
- PAIR SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING IN, 25% OVERLAP.
- INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING OUT, 25% OVERLAP.
- OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
- DIAMETER: 8.763mm NOMINAL. COLOR: BLACK.
- PRINT LEGEND: "MADISON CABLE CORP. TYPE CL2 75°C 26AWG (UL) TurboTwin™"
- DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
- UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TARBO TWIN™

3. CONNECTOR & HOOD:

- P1 & P2 :4X EJECTOR TYPE CONNECTOR:
- (1) HOUSING- ZINC DIE CAST
- (2) CONTACTS- .30u" INCHES GOLD PLATING

4. WITHOUT EQ

5. FOR CX4 3.125G

WIRING DIAGRAM			
P1		P2	
PIN NO.	SIGNAL	PIN NO.	SIGNAL
G1 - G9	GROUND	G1 - G9	GROUND
S1	RX0+	S16	TX0+
S2	RX0-	S15	TX0-
S3	RX1+	S14	TX1+
S4	RX1-	S13	TX1-
S5	RX2+	S12	TX2+
S6	RX2-	S11	TX2-
S7	RX3+	S10	TX3+
S8	RX3-	S9	TX3-
S9	TX3-	S8	RX3-
S10	TX3+	S7	RX3+
S11	TX2-	S6	RX2-
S12	TX2+	S5	RX2+
S13	TX1-	S4	RX1-
S14	TX1+	S3	RX1+
S15	TX0-	S2	RX0-
S16	TX0+	S1	RX0+
CONNECTOR SHELL		CONNECTOR SHELL	