

IEEE 802.3af 24-Port Power over Ethernet Web Management Injector Hub



Quick and Easy PoE Network Deployment

The PLANET POE-2400P4 is 24-Port IEEE 802.3af Power over Ethernet Web Management injector Hub and complies with IEEE 802.3, IEEE 802.3u and IEEE 802.3af standards. With 24 10/100Base-TX Fast Ethernet ports, POE-2400P4 support full 48V DC power for any remote IEEE 802.3af powered device (PD) like Wireless LAN Access Point, IP phone, and IP Camera. Supporting PoE power budget of 380 Watts, POE-2400P4 provides sufficient 15.4 Watts PoE power to 24 remote PD devices.

Easy Cabling installation

The POE-2400P4 is installed between a regular Ethernet Switch and the powered devices, injecting power without affecting the data transmission. The device offer a cost effective and quick solution to upgrade network system to IEEE 802.3af Power over Ethernet system without replacing the existing Ethernet switch. There are 48 RJ-45 STP ports on the front panel of PoE Injector Hub, in which the 24 ports on the lower stack function as "Data input" and the other 24 ports on the upper stack function as "PoE (Data and Power) output". Each of the "PoE output" port on the upper stack operates as a power injector which transmits DC Voltage to the CAT 5 cable to transfer data and power simultaneously between the Injector and Splitter.

Friendly / Simple Web Management Interface

To efficiently manage the powered devices, POE-2400P4 provide Web management interface in which administrators can use the functions including port Enable / Disable, port priority, system configuration, and Username / Password changing and with smart features for powered device. The PoE injector Hub can auto detect the power status of each port and show messages on its Web management interface. These features also provide a cost-effective way to manage the device via from Internet whenever you are at work or at home.

KEY FEATURES

INTERFACE

- 48-Port RJ-45 STP
 - 24-Port "Data input"
 - 24-Port "PoE (Data + Power) output"
- 1 10/100Base-TX Management port with Auto MDI / MDI-X feature

POE

- Complies with IEEE 802.3af Power over Ethernet Mid-Span PSE
- Up to 24 IEEE 802.3af devices powered
- Support PoE power up to 15.4 Watts for each PoE ports
- Auto detect powered device (PD)
- Circuit protection prevent power interference between ports
- Remote power feeding up to 100m

POE MANAGEMENT

- Total PoE power budget control
- Per port PoE function enable/disable
- PoE Port power feeding priority
- Per PoE port power limit
- PD classification detection

MANAGEMENT

- Web interface for remote management
- Firmware upgrade through Web interface
- PLANET Smart Discovery utility automatically finds PLANET devices on the network
- SNMP Trap for alarm notification of events

HARDWARE

- 19-inch rack mountable; 1U height
- Reset button for reset to default setting and system reboot
- LED indicators for PoE ready and PoE activity

STANDARD COMPLIANCE


- IEEE 802.3 10Base-T
- IEEE 802.3u 100Base-TX
- IEEE 802.3af Power over Ethernet
- FCC Part 15 Class A, CE

APPLICATIONS

PoE Injector Hub

For the places hard to find the power outlet, POE-2400P4 provides the easiest way to power your Ethernet devices such as PLANET IP Camera ICA-750 on the ceiling and the Wireless Access Point WAP-4060PE installed on the top of the building.

To control the power system of your networking devices, POE-2400P4 can directly co-work with PoE IP phone like PLANET VIP-254PT to build VoIP telephony network in the office. Furthermore, the POE-2400P4 can be directly connected to any third party 802.3af compliant devices and PoE Switches installed 100 meters away.

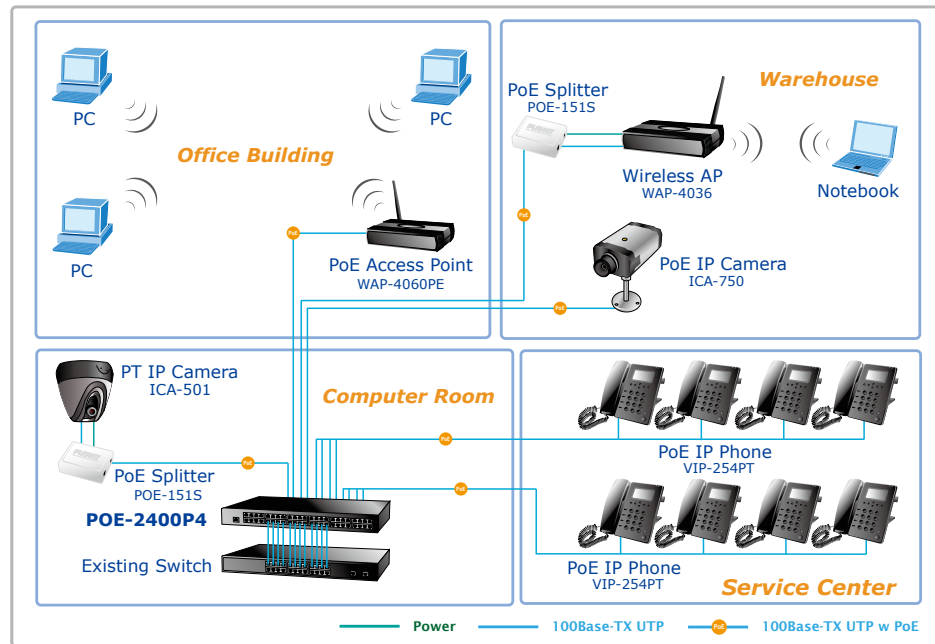

SPECIFICATION

Product	IEEE 802.3af 24-Port Power over Ethernet Web Management Injector Hub	
Model	POE-2400P4	
Hardware Specification		
Interface	"Data" Input Ports	24 x RJ-45 STP
	"Data+Power" Output Ports	24 x RJ-45 STP
	Management Port	1 x RJ-45; 10/100Base-TX, auto-negotiation, auto-MDI / MDIX
LED	System: Power x 1 (Green) Management Port x2: 10/100 (Green / Orange) Per PoE Port: PoE in Use x 1 (Green)	
Network Cable	10Base-T: 2-Pair UTP Cat. 3, 4, 5, up to 100m (328ft) 100Base-TX: 2-Pair UTP Cat. 3, 4, 5, up to 100m (328ft) EIA/TIA- 568 100-ohm STP (100m)	
Dimension (W x D x H)	440 x 200 x 44 mm (1U height)	
Weight	3.3kg	
Power Requirement	100-240V AC, 50/60 Hz	
Power Consumption	400 Watts max.	
Operating Temperature	0 ~ 50 Degree C	
Storage Temperature	-40 ~ 70 Degree C	
Humidity	5 ~ 95% (Non-condensing)	
Cooling	Fan x 2	
Power over Ethernet		
PoE Standard	IEEE 802.3af Power over Ethernet / Mid-Span PSE	
PoE Power supply Type	Mid-Span	
PoE Power Output	Per Port DC 48V 15.4 Watts	
Power Pin Assignment	4/5(+), 7/8(-)	
PoE Power Budget	380 Watts	

Management

Management Interface	Web, PLANET Smart Discovery Lite Power Limit by Priority and Total Limit Per port power enable/disable
PoE Management	Power feeding priority Current usage and status Total power consumption
Management Feature	System / Management functions setup Web firmware upgrade SNMP Trap for alarm notification of events

Standards Conformance

Standards Compliance	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3af Power over Ethernet
Regulation Compliance	FCC Part 15 Class A, CE

ORDERING INFORMATION

POE-2400P4	IEEE 802.3af 24-Port Power over Ethernet Web Management Injector Hub (400 Watts full power)
-------------------	---

RELATED PRODUCTS

POE-151S-5V	IEEE 802.3af Power Over Ethernet Splitter with 5VDC output (Mid-Span), (10/100Mbps)
POE-151S-12V	IEEE 802.3af Power Over Ethernet Splitter with 12VDC output (Mid-Span), (10/100Mbps)
POE-152S-5V	IEEE 802.3af Power Over Ethernet Splitter with 5VDC output (End-Span), (10/100/1000Mbps)
POE-152S-12V	IEEE 802.3af Power Over Ethernet Splitter with 12VDC output (End-Span), (10/100/1000Mbps)
FSD-803PE	8-Port 10/100Mbps Fast Ethernet Switch w/ IEEE 802.3af splitter built-in
ICA-107P	PoE CMOS IP Camera
ICA-310	30-meter Infrared Internet Camera
ICA-700	CCD Box Internet Camera
ICA-750	Dual Mode CCD Box Internet Camera
IVS-110	1-Channel Internet Video Server
WAP-4033PE	54Mbps Wireless PoE Access Point
WAP-4060PE	54/108Mbps Super G Wireless LAN Managed Access Point with PoE
WDAP-2000PE	54/108Mbps Super A+G WLAN Managed Access Point with PoE
VIP-254PT	SIP PoE IP Phone
VIP-255PT	PoE IP Phone
VIP-156PE	802.3af PoE SIP Analog Telephone Adapter
VIP-350PT	Business PoE IP Phone
VIP-550PT	Professional PoE IP Phone